


安装外形图 Overall dimension




型号 Model	L
STP25	443
STP35	443
STP50	443
STP75	465
STP100	465
STP120	465

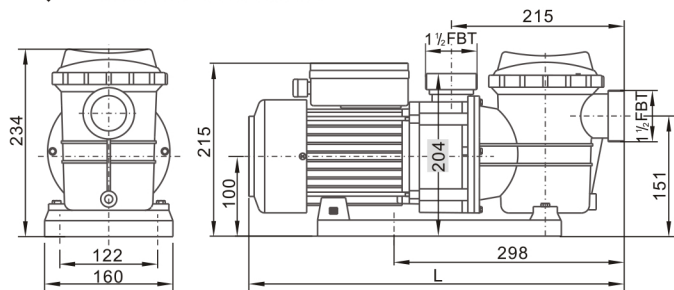

EN 60335-1: 2012+A11
EN 60335-2-41: 2003+A1+A2
EN 62233 : 2008
ZEK 01.04-08/11.11
ERP547 / 2012

SAA

AS/NZS60335.1
AS/NZS60335.2.41





海水养殖循环过滤
Mariculture circulation filter



泳池循环过滤
Recirculation of water in swimming pool equipment

性能曲线 Performance curves

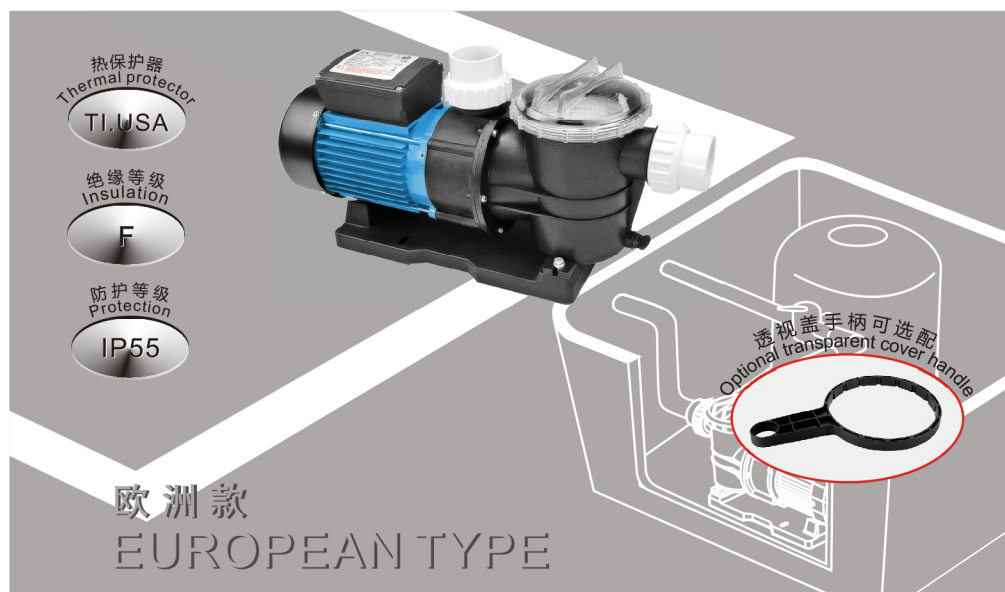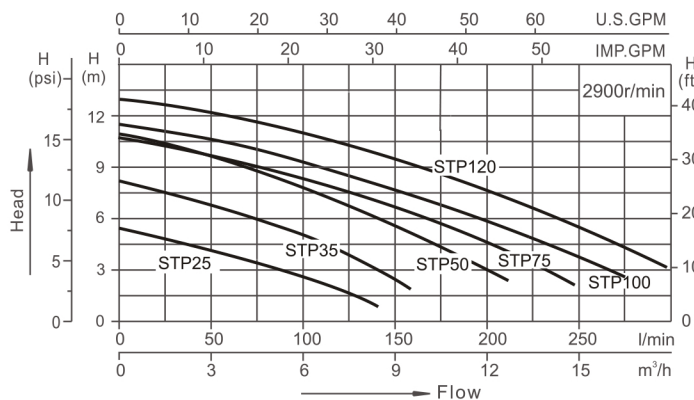

欧洲款
EUROPEAN TYPE

技术参数列表 Technical parameter list

型号 Model	最大流量 Qmax (l/min)	最大扬程 Hmax (m)	电压/频率 V/Hz	输入功率 Power(P ₁)		电流 (Amps)	接口尺寸 Fitting size (mm)	毛重 G.W (Kg)	包装尺码 Packing size (mm)
				kW	HP				
STP25	140	5	220-240/50	0.18	0.25	0.9	48.5or50	6	470×180×295
STP35	160	8	220-240/50	0.25	0.35	1.6	48.5or50	6.5	470×180×295
STP50	210	11	220-240/50	0.37	0.5	2.0	48.5or50	7	470×180×295
STP75	240	10.5	220-240/50	0.55	0.75	3.2	48.5or50	8.8	495×195×295
STP100	275	11	220-240/50	0.75	1.0	3.8	48.5or50	9.5	495×195×295
STP120	300	13	220-240/50	0.9	1.2	4.6	48.5or50	9.8	495×195×295

230V/60Hz, 110V/60Hz, 110V/50Hz models are available on request

工作条件

介质温度: 5-50℃
环境温度: ≤50℃
最大工作压力: 0.3MPa

Working conditions

Medium temperature: 5-50℃
Environmental temperature: ≤50℃
Max. working pressure: 0.3MPa

序号 NO.	名称 Name
1	接头螺母 Tie-in Nut
2	接头 Tie
3	O形圈 O-Ring
4	放水螺塞 Drainage Plug
5	O形圈 O-Ring
6	六角头螺栓和平垫圈组合件 Hexagon head bolt and plain washer assembling
7	泵盖 Pump Cover
8	滤篮 Filter
9	透视盖胶垫 Transparent cover pad
10	透视盖 Transparent Cover
11	透视盖手柄 Transparent cover handle
12	O形圈 O-Ring
13	盖板 Cover panel
14	十字槽盘头自攻螺钉 Cross recessed pan head tapping screws
15	叶轮 Impeller

序号 NO.	名称 Name
16	机械密封 Mechanical seal
17	泵壳 Pump Casing
18	电机 Motor
19	底板胶条 Block Gine
20	六角头螺栓 Hexagon bolt
21	平垫圈 Washer
22	底板 Base

