


安装外形图 Overall dimension





型号 Model	L	H	E
SFE200	625	236.5	2.5FBT or 4.5BUTT
SFE300	642	254	
SFE400	656	257	
SFE400S	656	257	

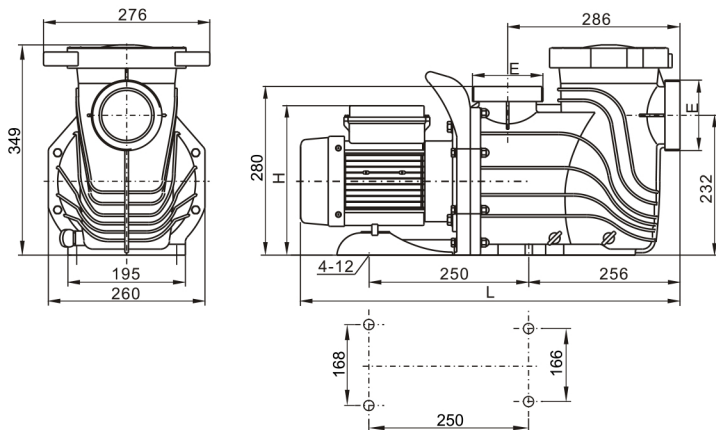

泳池循环过滤
Recirculation of water in
swimming pool equipment

性能曲线 Performance curves

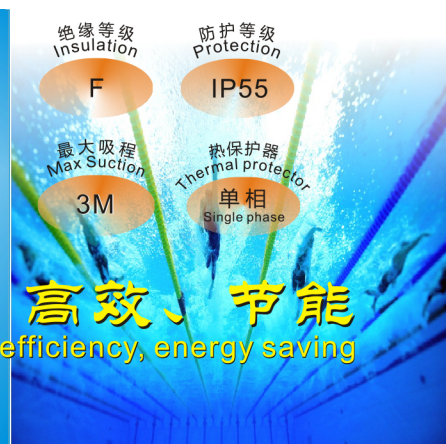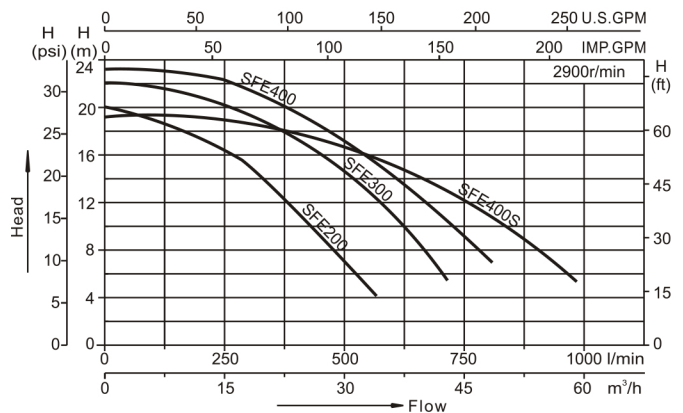

技术参数列表 Technical parameter list

型号 Model	最大流量 Qmax (L/min)	最大扬程 Hmax (m)	输入功率 Power(P ₁)		电压/频率 V/Hz	电流 (Amps)	接口尺寸 Fitting size(mm)	
			kW	HP			2.5FBT	4.5BUTT
SFE200	560	20	1.5	2	220-240/50	7		73
SFE300	715	22	2.2	3	220-240/50	10	73	75
SFE400	800	23	3	4	220-240/50	14	60.3	76
SFE400S	980	19	3	4	220-240/50	14	63	88.9
								90

特点

1. 进出水口标配2.5寸接头，可选配3寸接头。
2. 具有自吸功能，最大自吸高度可达3米。
3. 一体式提手，安装便捷。

Feature

1. The inlet and outlet are equipped with 2.5-inch connector as standard, and 3-inch joint is optional.
2. With self-priming function, the maximum self-priming is up to 3 meters.
3. Integrated handle, easy to install.

工作条件

介质温度: 0-75℃

环境温度: ≤50℃


最大工作压力: 0.7MPa

Working conditions

Medium temperature: 0-75℃

Environmental temperature: ≤50℃

Max.working pressure: 0.7MPa

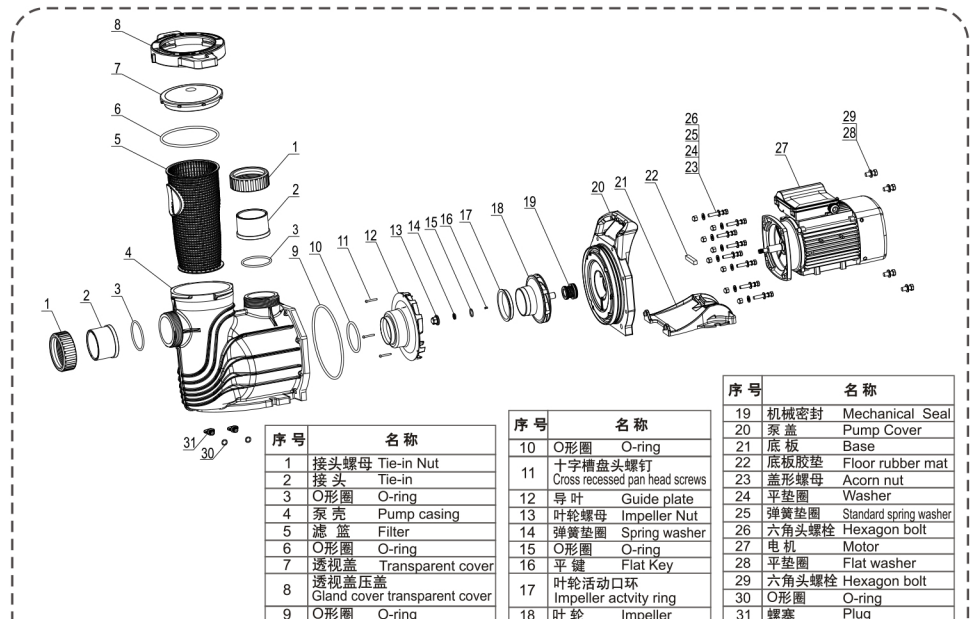

序号	名称
1	接头螺母 Tie-in Nut
2	接头 Tie-in
3	O形圈 O-ring
4	泵壳 Pump casing
5	滤芯 Filter
6	O形圈 O-ring
7	透视盖 Transparent cover
8	透视盖压盖 Gland cover transparent cover
9	O形圈 O-ring

序号	名称
10	O形圈 O-ring
11	十字槽盘头螺钉 Cross recessed pan head screws
12	导叶 Guide plate
13	叶轮螺母 Impeller Nut
14	弹簧垫圈 Spring washer
15	O形圈 O-ring
16	平键 Flat Key
17	叶轮活动口环 Impeller activity ring
18	叶轮 Impeller

序号	名称
19	机械密封 Mechanical Seal
20	泵盖 Pump Cover
21	底板 Base
22	底板胶垫 Floor rubber mat
23	盖形螺母 Acorn nut
24	平垫圈 Washer
25	弹簧垫圈 Standard spring washer
26	六角头螺栓 Hexagon bolt
27	电机 Motor
28	平垫圈 Flat washer
29	六角头螺栓 Hexagon bolt
30	O形圈 O-ring
31	螺塞 Plug